

LED BOLLARD INSTALLATION GUIDE

WARNING

RISK OF FIRE, ELECTRIC SHOCK, INJURY OR PROPERTY DAMAGE.



- Risk of electric shock--Disconnect power to equipment before installing or servicing. This equipment must be installed according to all applicable codes & ordinances.
- Installation and service of this equipment must be performed by qualified service personnel.
- Read these instructions before installing, servicing or maintaining this equipment.
- Save these instructions for maintaining and servicing.
- The installer must ensure that the foundation is stable and can support the luminaire's weight.
- The Installer must use proper means to secure the luminaire to the ground.

CAUTION


- Edges may cut--wear gloves while handling or servicing this equipment.
- Inspect equipment for damage from shipping and handling.
- Recommended cleaning substances:
- Wipe off dust with a dry, soft cloth. Remove greasy spots etc. with a soft cloth dampened in lukewarm water (<math>< 122^{\circ} \text{F} / 50^{\circ} \text{C}</math>) with a mild detergent.
- Never use detergents containing abrasives and solvents.
- Warning: Scouring powder and similar substances will scratch surfaces.

LUMINAIRE PREPARATION


Remove the luminaire (Fig 1) and accessories (Fig 2) from the carton and inspect luminaire for damage. Do not install a damaged luminaire.

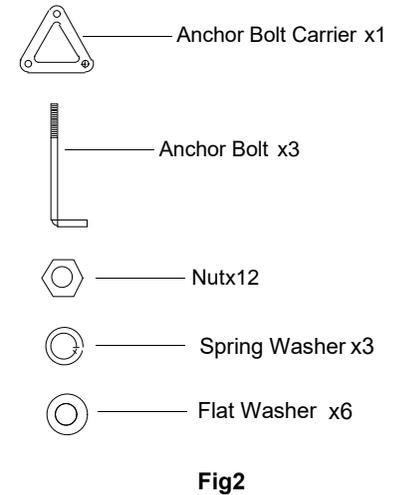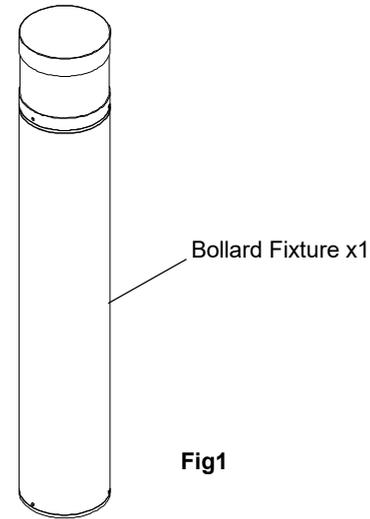


INSTALLING BOLLARD

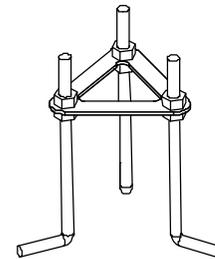


- Prepare site. Get the anchor bolt carrier assembled as Fig3 and use it to determine placement of anchor bolts in concrete.
- Ensure that concrete base is suitable for the bollard load.
- Install three anchor bolts into concrete as per attached drawing, having at least 1-1/2~2" protruding from concrete with threads free and clear of debris and dirt.(Fig4)

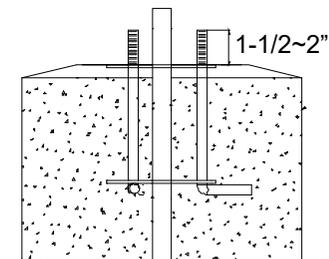


- Dis-assemble the fixture by loosening the set screwsx3 with hex wrench. (Fig5)
- Lay the fixture down by the side of the installed anchor bolts. Keep the wires connected. (Fig6)

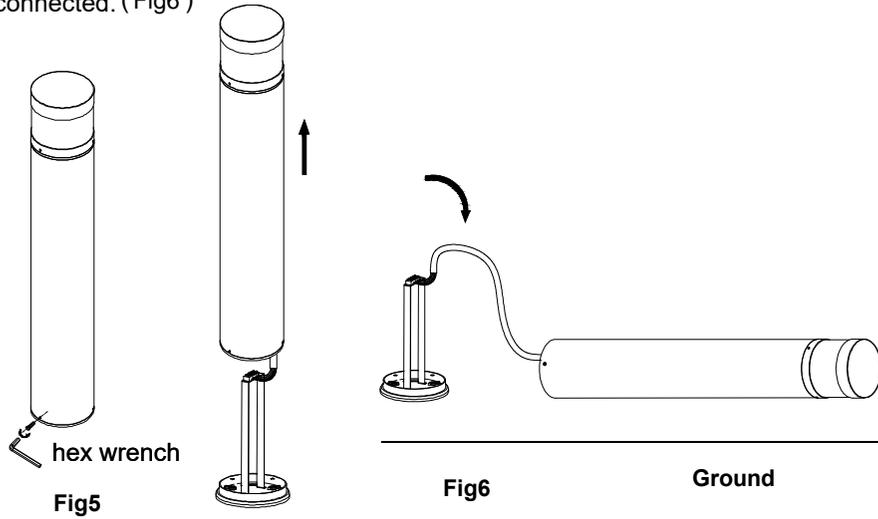

- Place bollard base plate over anchor bolts and tighten nuts securing the base plate to the foundation. (Fig7)
- As the wires shown on Fig7 will not be disconnected during installation, so please double check to make sure they are in good connection after the base installation.

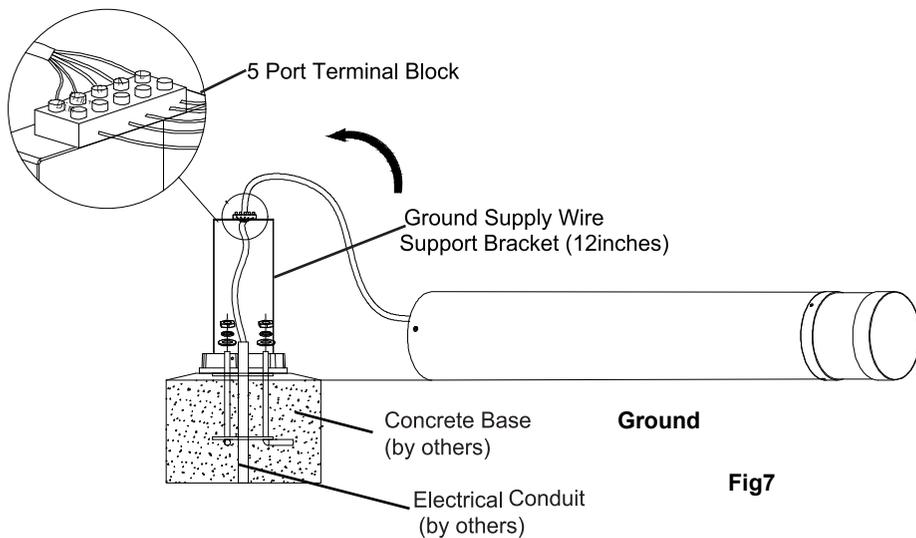


- Put back the fixture body, and tighten the set screwsx3 with hex wrench. (Fig8)

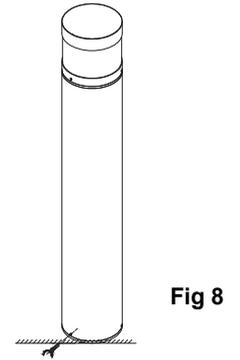

- 3 steps to set CCT and Wattage (Fig9)

- #1: Use the hex wrench to open the bollard head
- #2: Select the desired CCT and Wattage by the switches
- #3: Install the bollard head back

Remarks: Default Setting—22W, 5000K

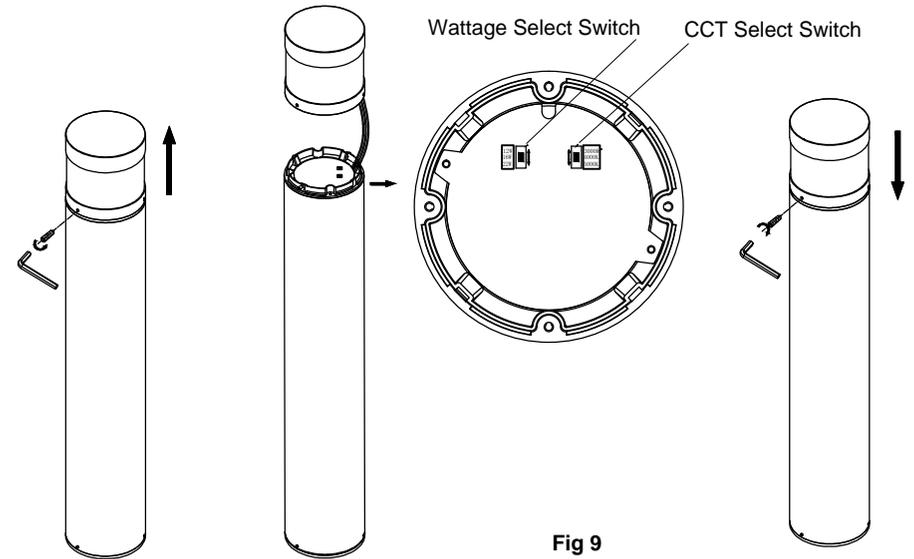

WIRING DIRGRAM

